




Rollin® Graffity Plus

Key performance


- Excellent half tone reproduction and reduced gain on press
- Excellent print quality and edge marking resistance
- **Implements all benefits of Dynatech System:**
 - Better vibration absorption
 - Less gears streaking marks
 - Higher paper smash resistance
 - Blanket consistency and high performance

MAIN APPLICATION Commercial Web, Newspaper Coldset, Newspaper Heatset

Rollin Graffity Plus is available in 3-ply, (1,96/1,71 mm) thickness.



Standard

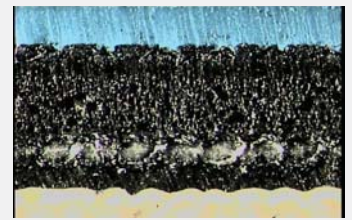

Rollin Graffity Plus



The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Dark blue
THICKNESS (mm)	1,96/1,71
AVERAGE LOAD VALUE N/cm² @ 0,23 mm Indentation	250
SURFACE ROUGHNESS (Ra micron)	0,8
ELONGATION (%)	<0,9
TENSILE STRENGTHS (N/mm)	>60
FEED FEATURES	Positive
WATER & SOLVENT PROTECTION	Yes
NEW TECHNOLOGY	Dynatech System
ADDITIONAL INFORMATION	
APPLICATIONS	Suitable for commercial web heatset and newspaper applications

Distributed by:

DISTRIBUTOR